

LED SPOT LIGHT
SP-EA-R195/R225



SP-EA-R195



SP-EA-R225



Shield

- Structural waterproof;
 - High voltage input, DMX512/RDM control;
 - Maximum power 40W;
 - Narrow beam angle, 5° and 8° are available;
 - RGBW mode has good mixing effect;
- Suitable for ultra-low temperature environment


Can be customized and wall the same color of the lamp body

 - Daytime can also be well integrated into the building


Angle adjustment and simple installation



Physical&Installation Dimensions

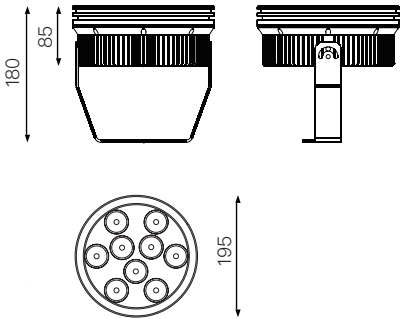

SP-EA-R195

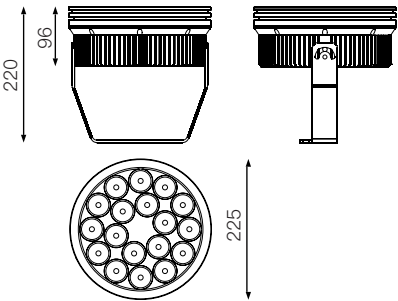

SP-EA-R225

Model Info&Specifications

Model	Diameter	Power(Max)	Colours	Lumen (max)	Beam Angle	Control	Chips Brand	Package
SP-EA-R195A-6P	φ195	20W	RGBW	1422 lm	5° /10°		EPISTAR	3.1±5%Kg 4 Units/Ctn 58.5*30 *57.5CM
SP-EA-R195A-9P	φ195	20W	2700K/3000K 4000K/6000K R+G+B	3077 lm 714 lm	20° /25°		OSRAM	3.1±5%Kg 4 Units/Ctn 58.5*30 *57.5CM
SP-EA-R225A-12P	φ225	40W	RGBW	2464 lm	35° /40°		CREE	4.5±5%Kg 4 Units/Ctn 61.5*31.5 *60CM
SP-EA-R225A-18P	φ225	40W	2700K/3000K 4000K/6000K R+G+B	5518 lm 1778 lm	60°	 	San'an BRIDGELUX	4.5±5%Kg 4 Units/Ctn 61.5*31.5 *60CM

